



Computer Engineering
Suan Sunandha Rajabhat University

Introduction to Digital Systems

Dr.Pongrapee Kaewsaiha





CPE1405 – Fundamentals of ...



<https://pongrapee.net/>



Continuous and discrete (on/off) stages

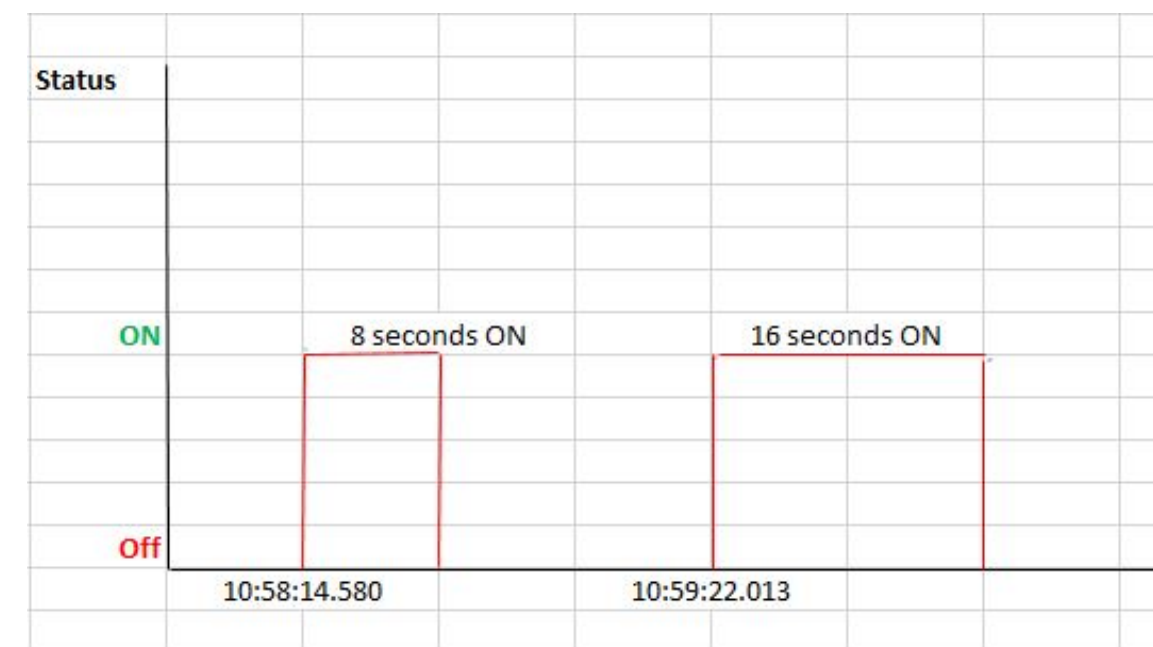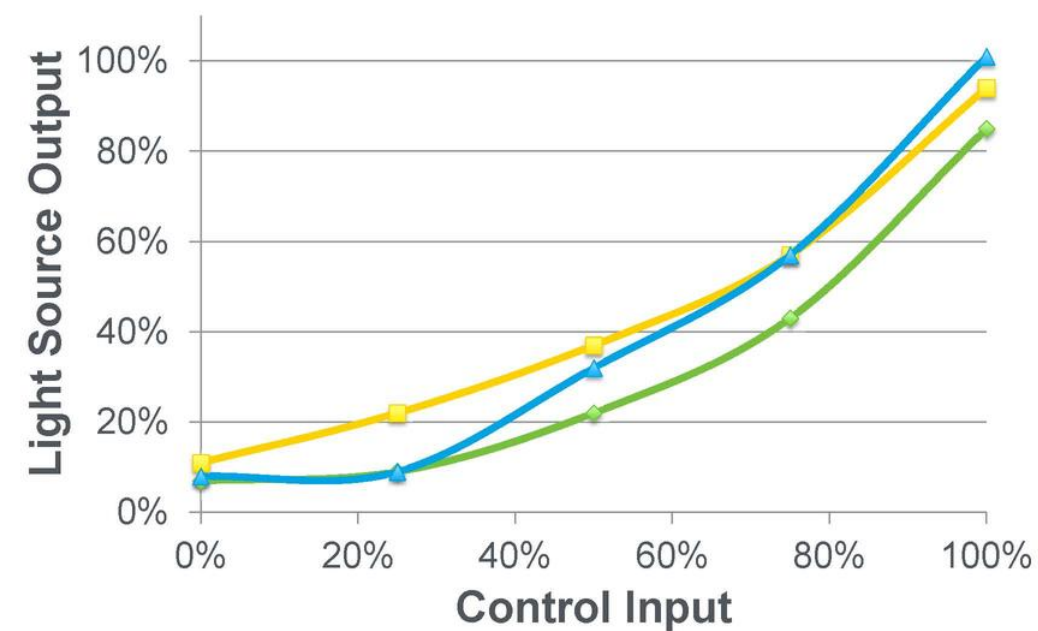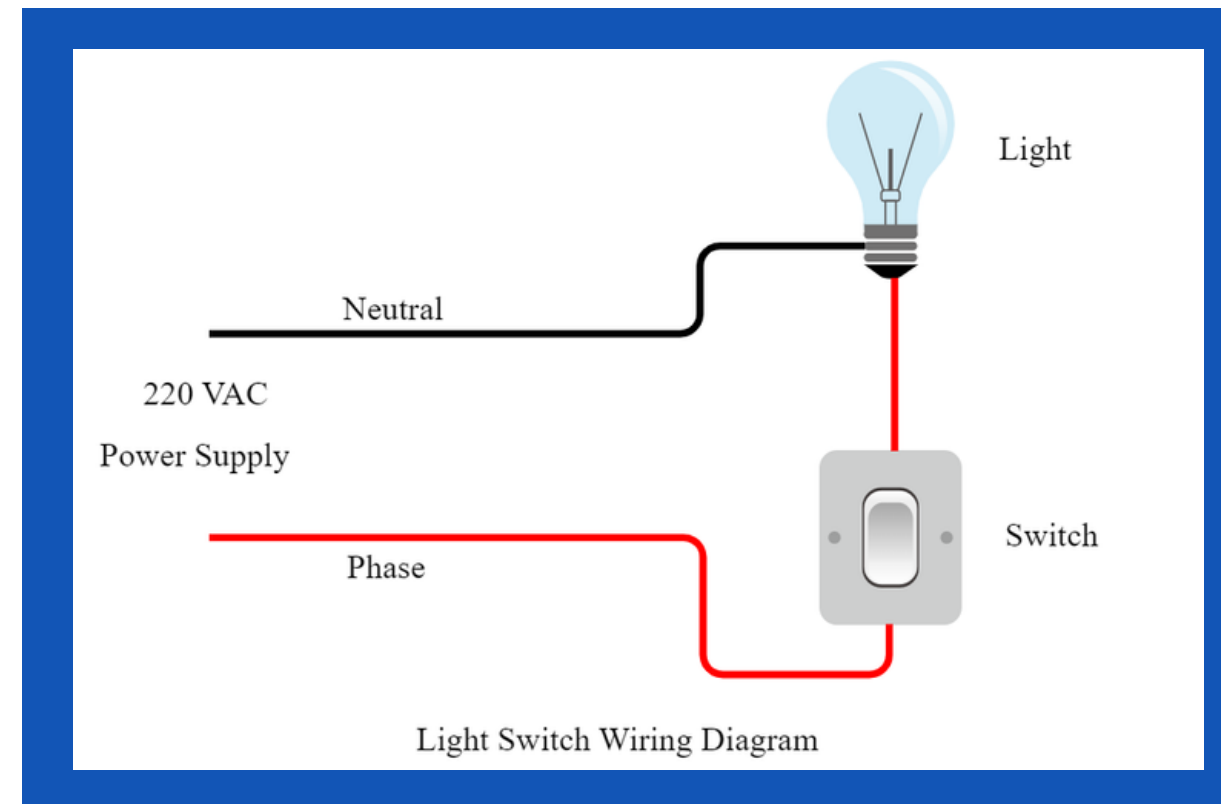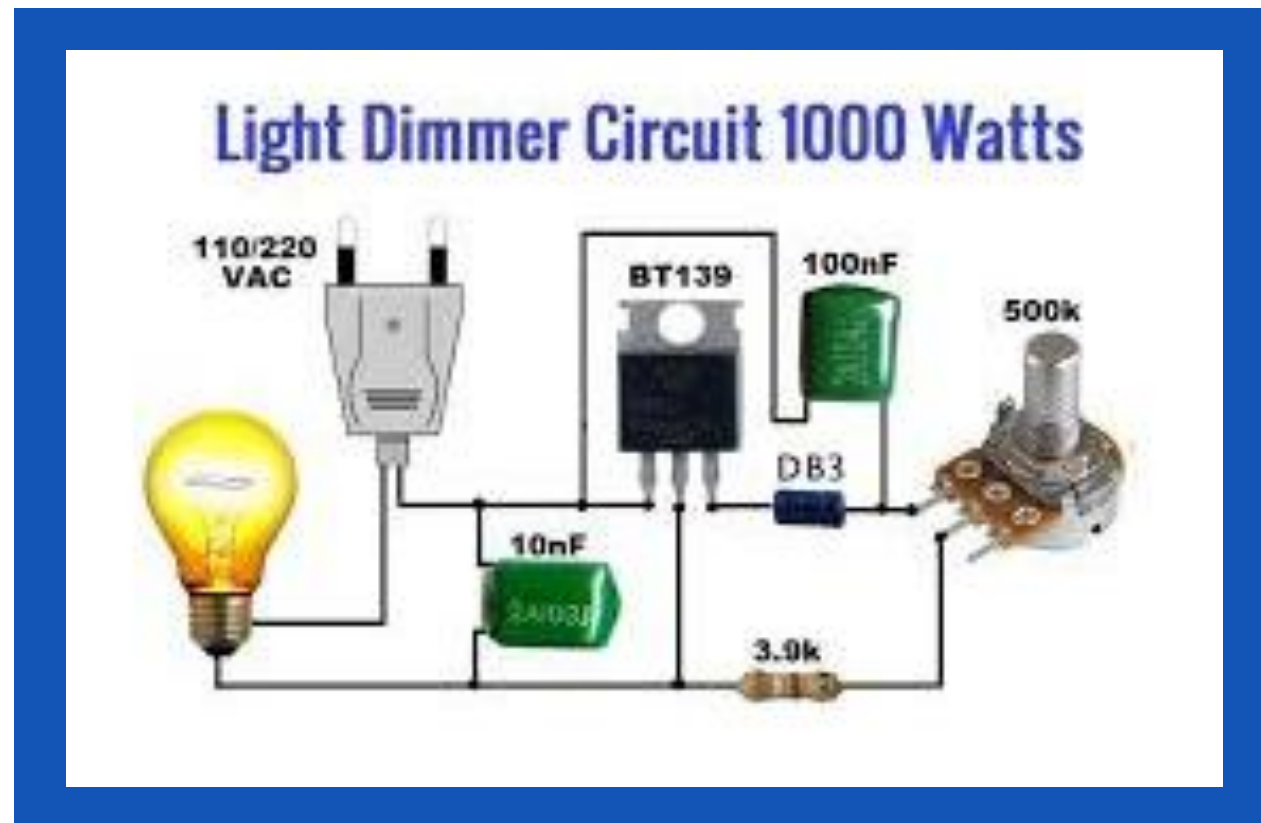



Continuous and discrete data

Continuous data

The data can take on any value within a finite or infinite interval.

Examples

Cost/Weight, Speed/Time

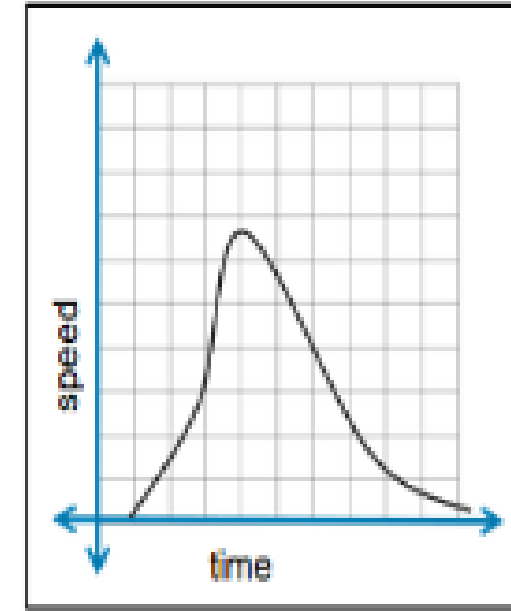
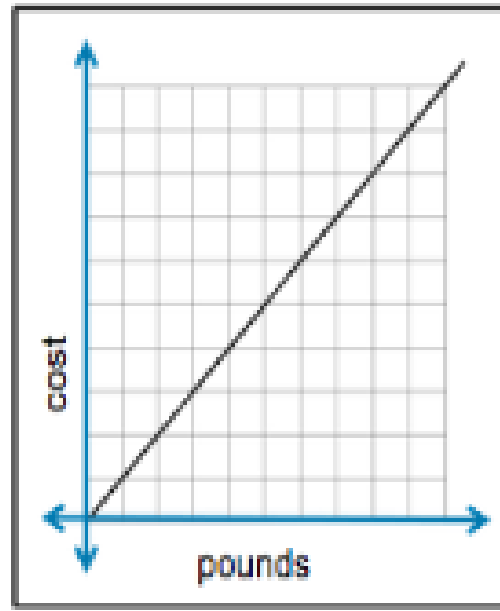


Discrete data

The data can be counted in a finite amount of time.

Examples

Height/Age, Cost/Ticket

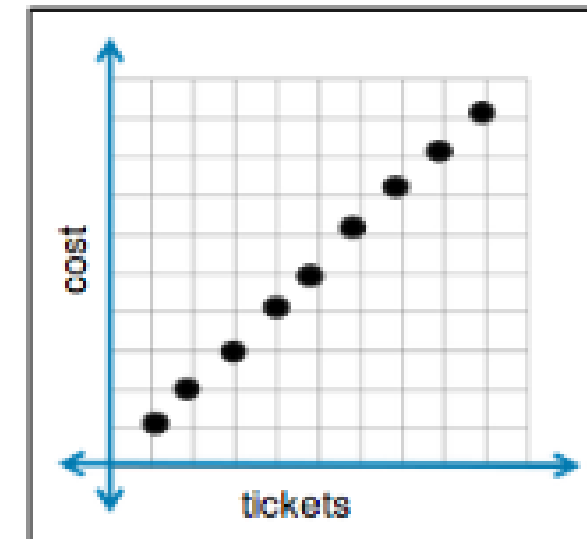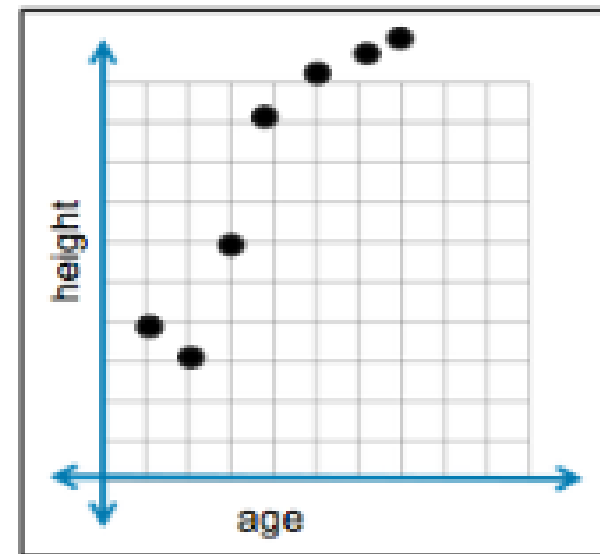

Attempt a quiz

Quiz **7**, Page **1**, Questions **1-4**






Continuous-time and discrete-time signals

Continuous-time signal

Amplitudes vary smoothly and continuously over time.

Examples

- Sound – Volume and frequency change continuously.
- AC current – Voltage changes alternately.
- Temperature – Temperature changes over time.

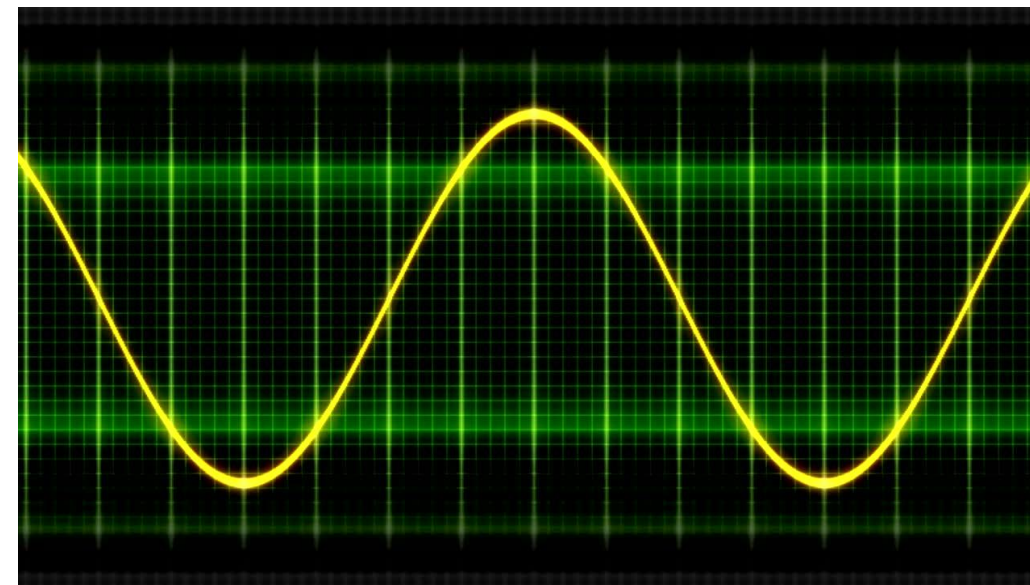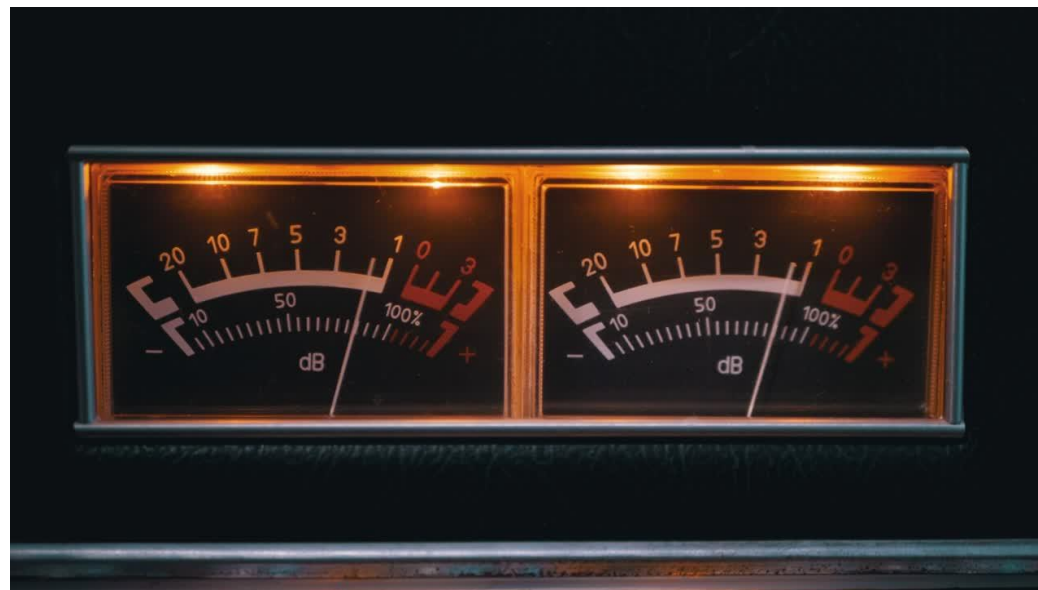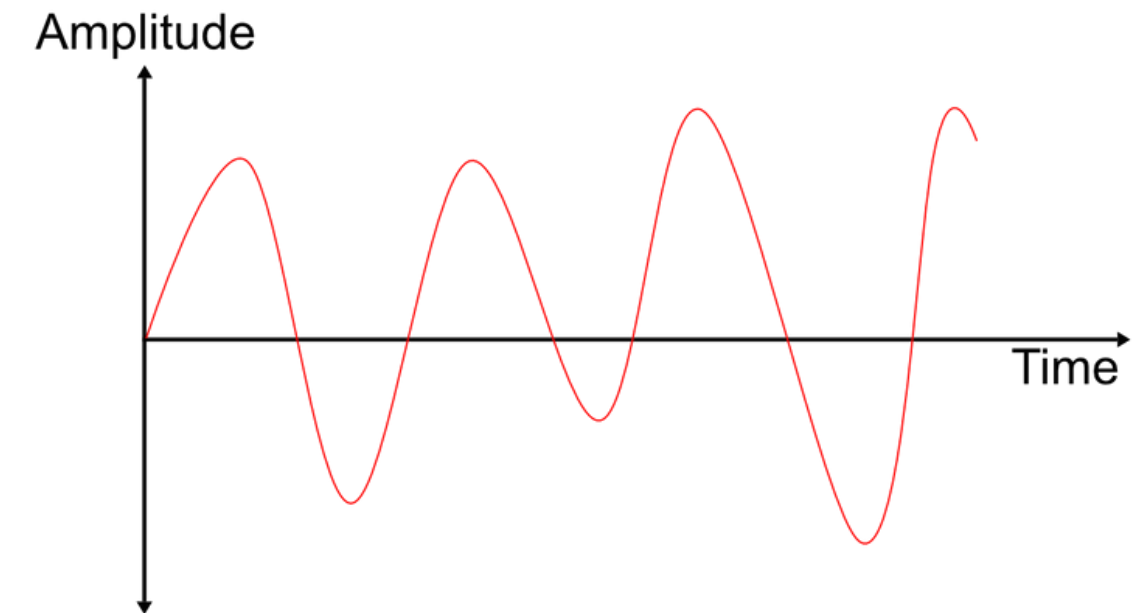


Discrete-time signal

Amplitudes are defined only at specific points of time. These points are typically equally spaced, with a fixed time interval between consecutive points.

Examples

- Weight measured every month
- Temperature measured every hour
- Sound played every second

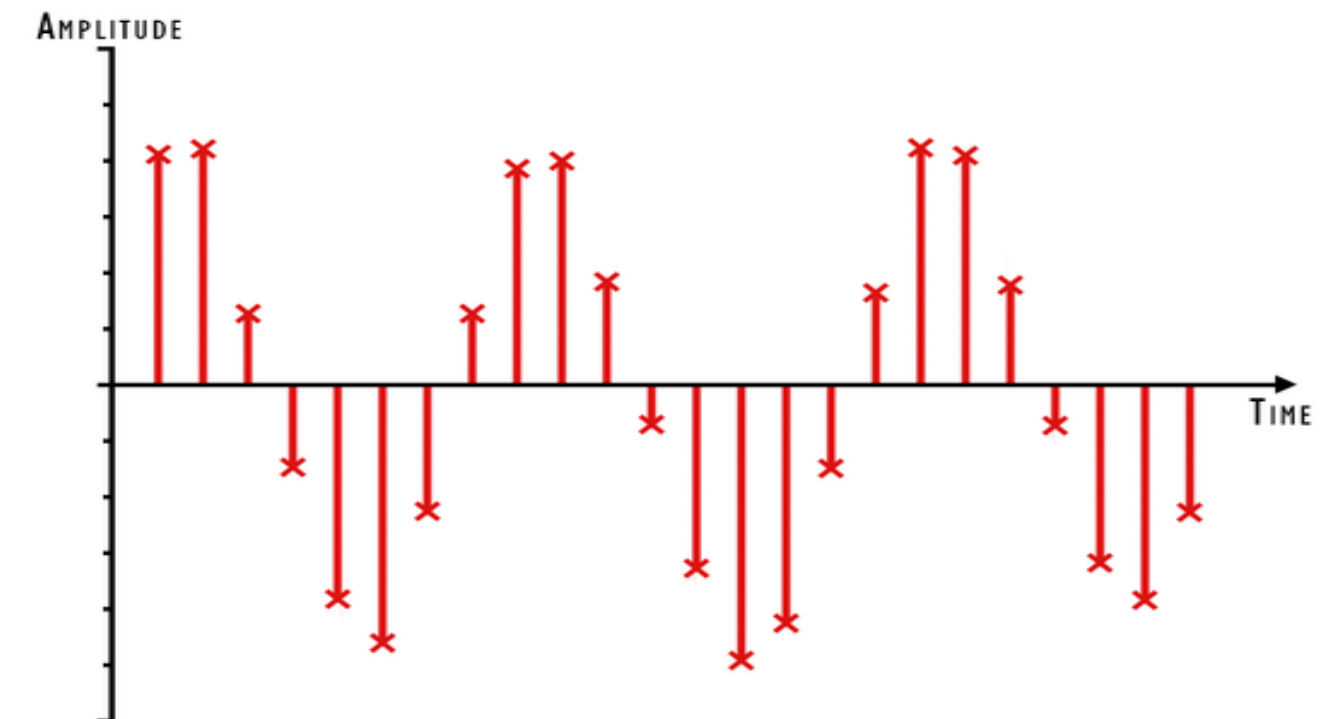

Analog and digital signals


Analog signal	Digital signal
Continuous-time data	Discrete-time data
Amplitude changes with time	Amplitude changes with time
Amplitude covers a wide range of real numbers	Amplitude can have two possible values (on/off)
Almost all signals in nature are analog signals	Digital signals are used in digital devices

Examples

- Voice – Volume and frequency change continuously.
- AC current – Voltage changes alternately.



Examples

- Signal transmitted through a USB cable.
- Signal transmitted through an optical fiber network.

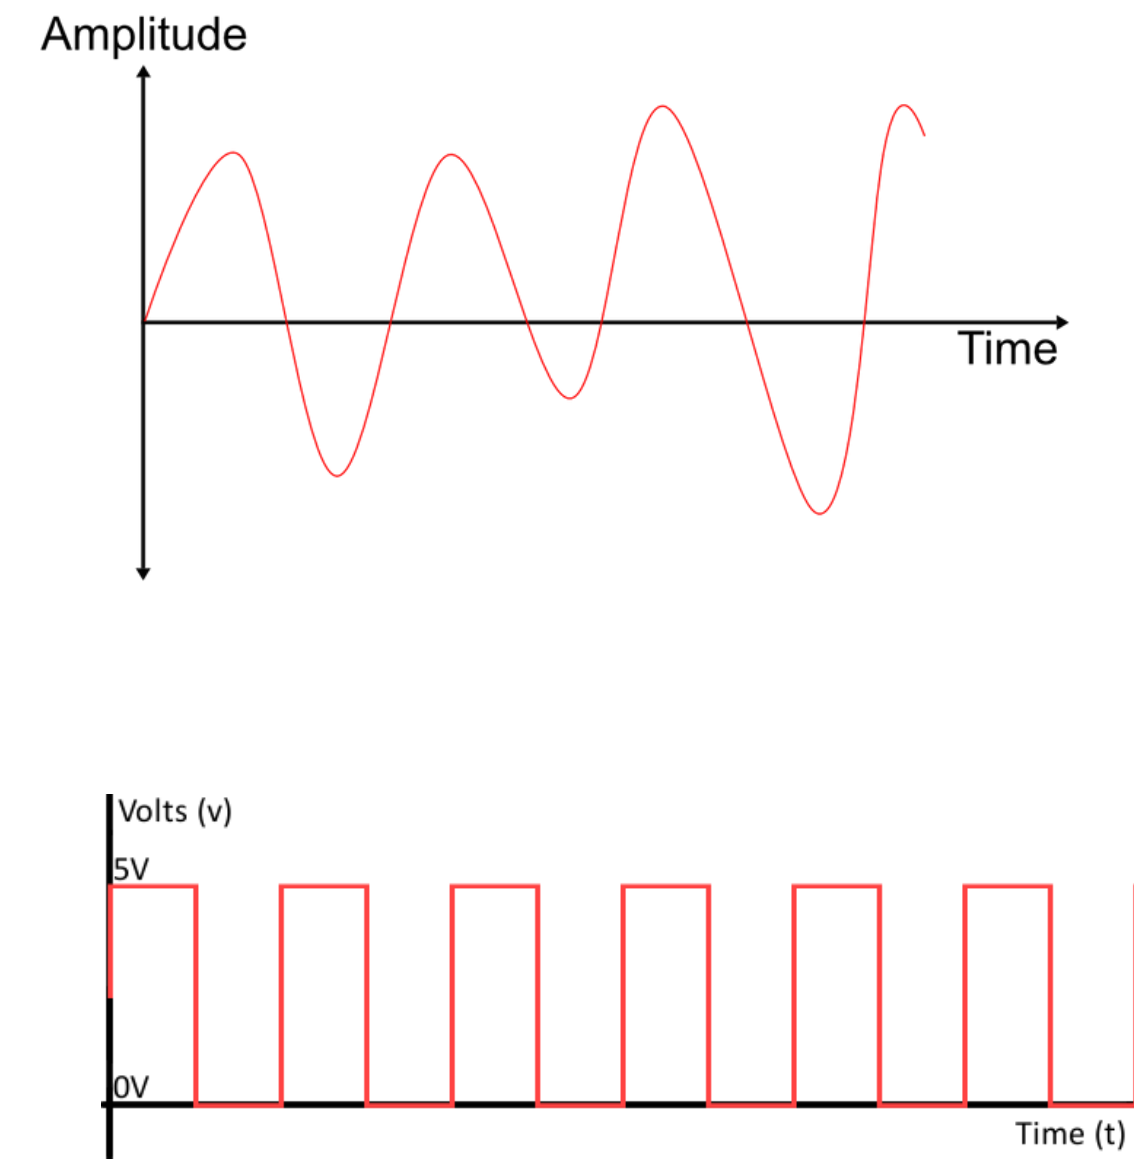


Logic *(in digital electronics and signal processing)*

Digital signal processing considers higher levels as **1** and lower levels as **0** which, in most cases, represents voltage levels **5V** and **0V**, respectively.

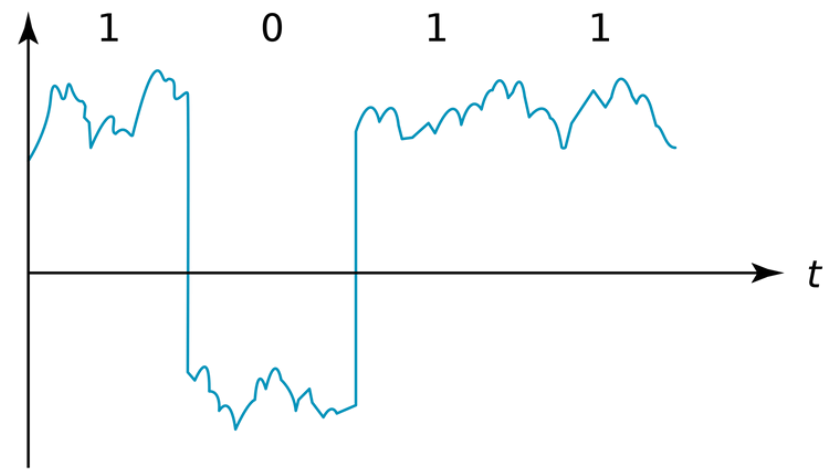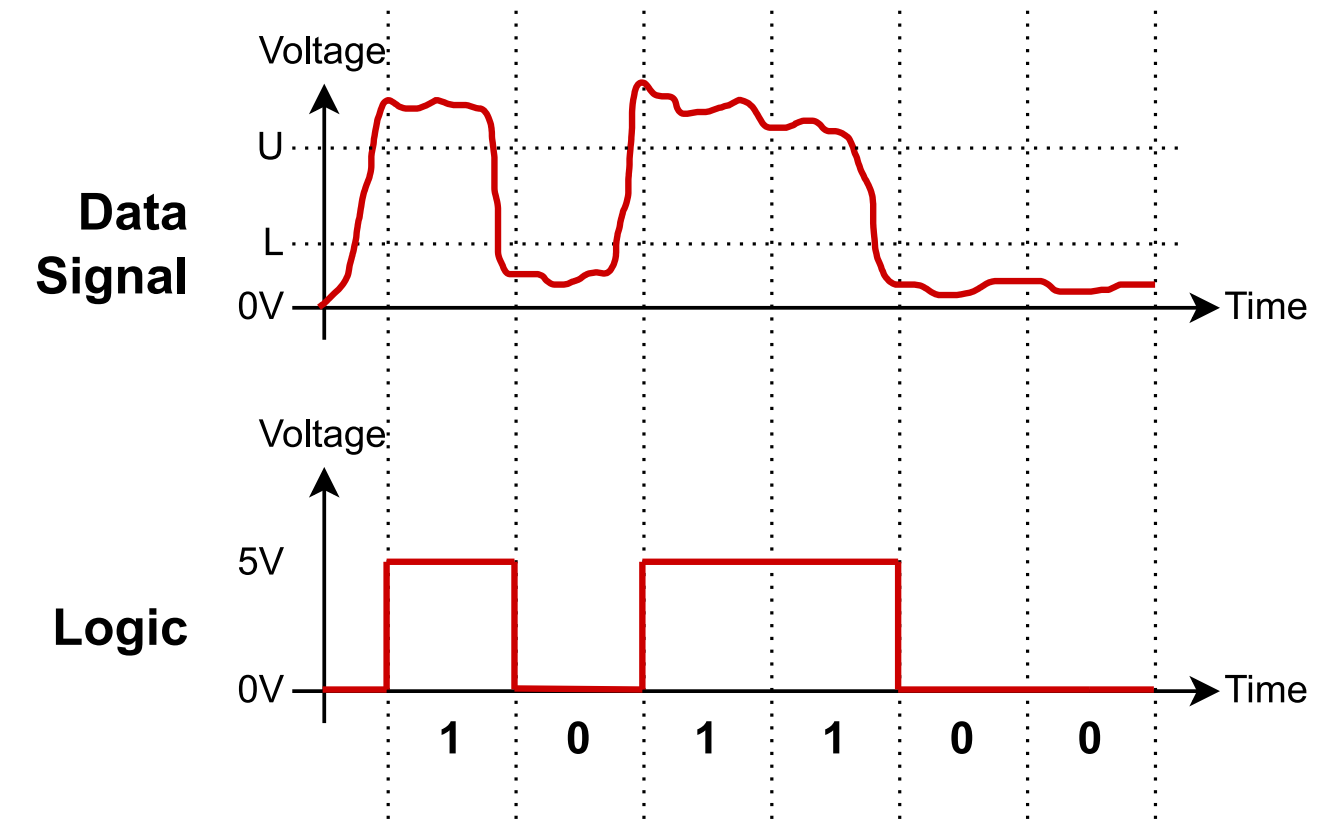

Digital signal is strong against noise and disturbance.
A received digital signal may be impaired by noise and distortions without necessarily affecting the digits

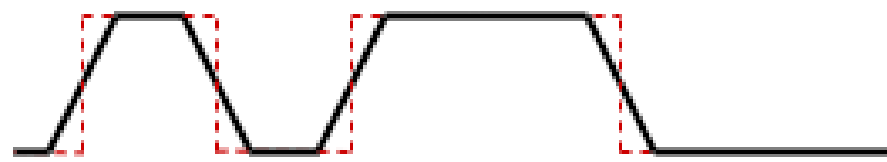

No real-world circuit can instantly change voltage levels.
There will be small response time.



Attempt a quiz

Quiz **7**, Page **2**, Question **5**



Analog and digital media



Analog media

Analog media keeps the entire record (continuous-time) with almost no data loss.

It is difficult to search or manipulate analog data.

Automation has to be done mechanically.




Digital media

Digital media keep records at (time) intervals.

You see that a digital signal is not smooth.

Example


time	amplitude
0.000	7.810
0.020	4.180
0.040	5.660
0.060	8.460
0.080	5.570
0.100	8.490
0.120	3.300

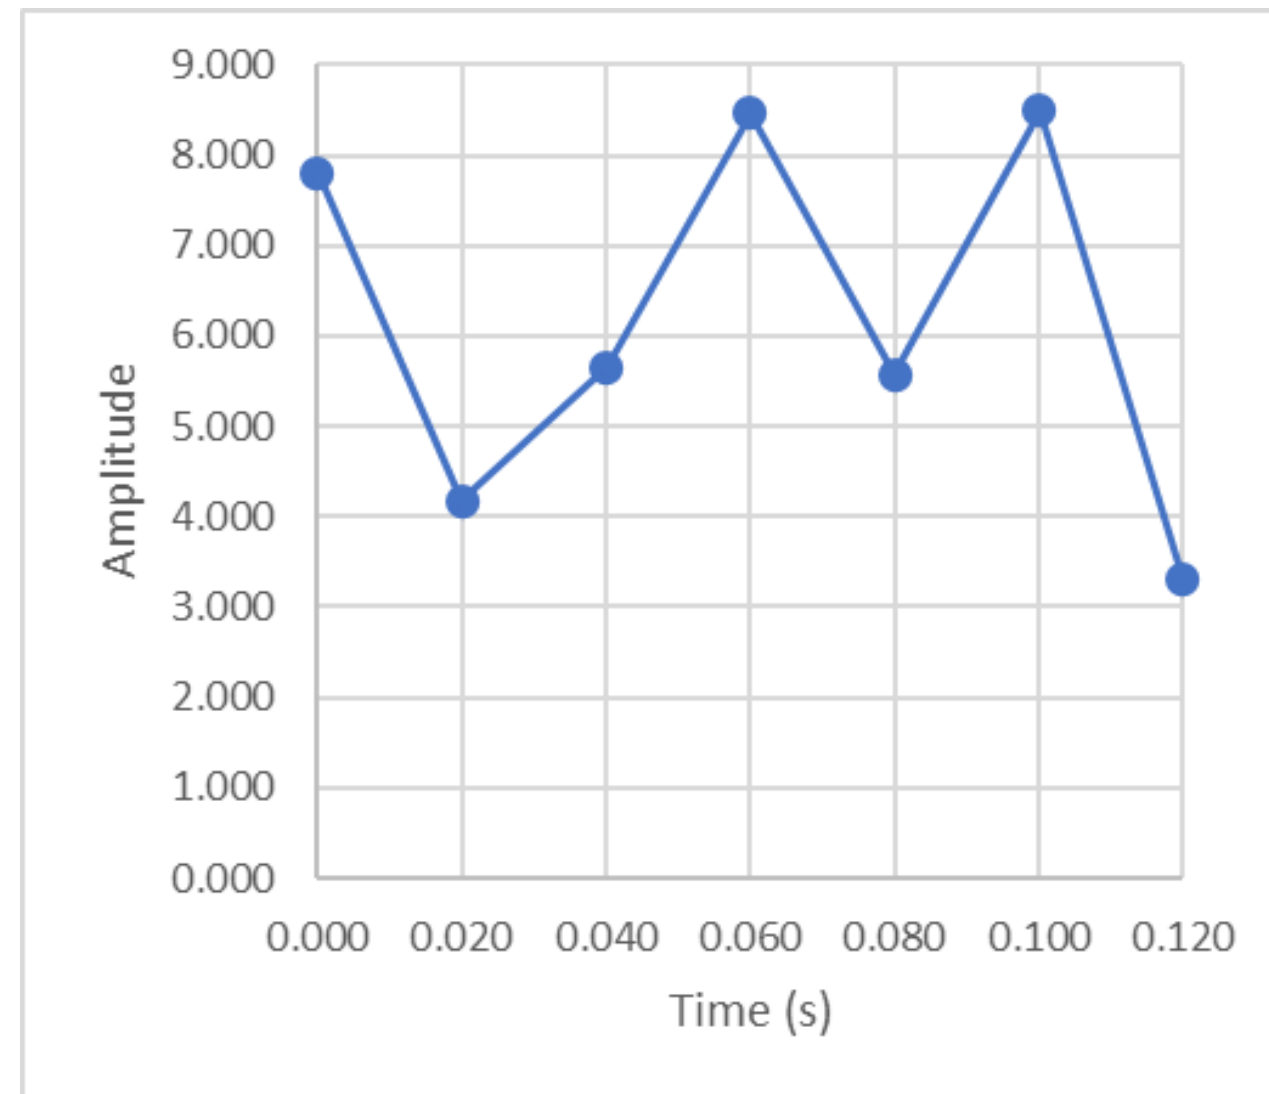

Source: PCMag



Converting analog to digital (A/D) is done through a sampling process where the original analog data will be sampled at intervals.

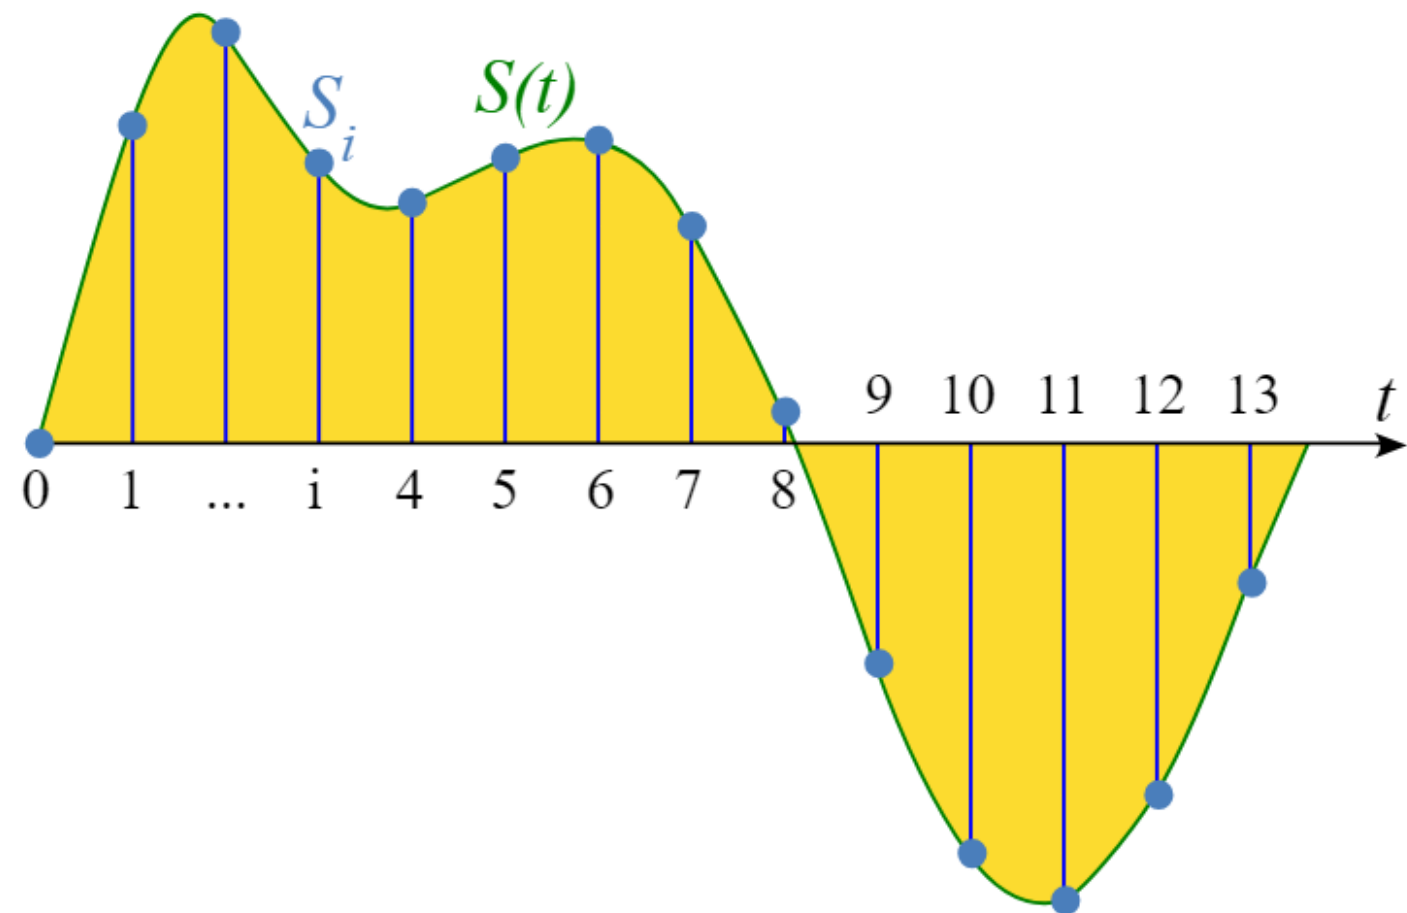

Example: Digital audio sampling


- 8 kHz – Telephone
- 44.1 kHz – CD quality
- 48 kHz – DVD quality

Digitally recording or digitizing analog media will always result in the loss of some of the original data.



It is easy to search or manipulate digital data.

- Crop, copy, delete
- Change amplitude (volume)
- Limit maximum amplitude
- Change frequency (pitch)
- Band-pass filter



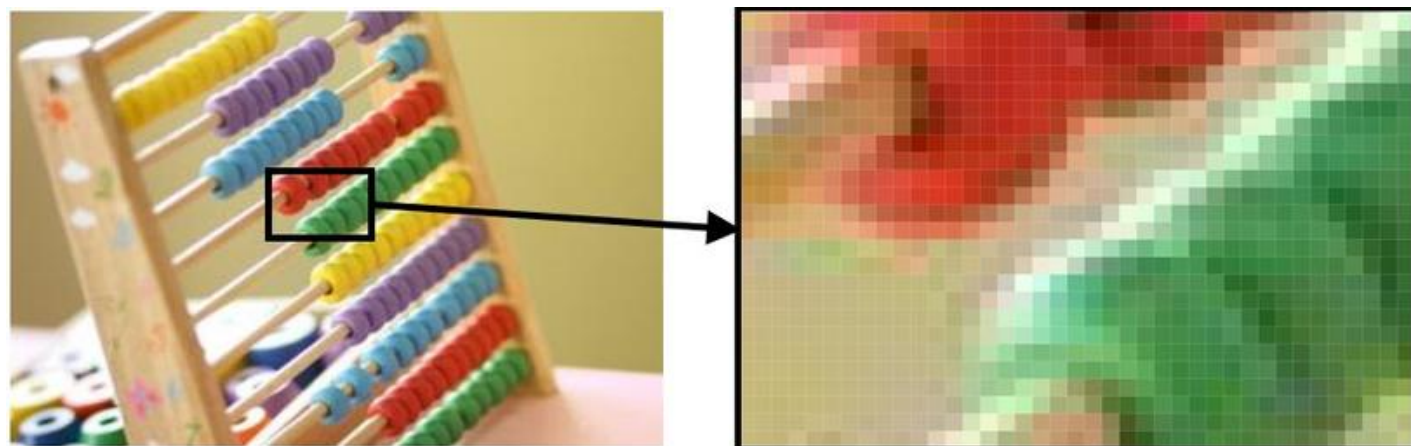

Raster graphics, a kind of digital images (such as JPG and PNG) keeps data as a pixel grid made of a 3-dimensional array.

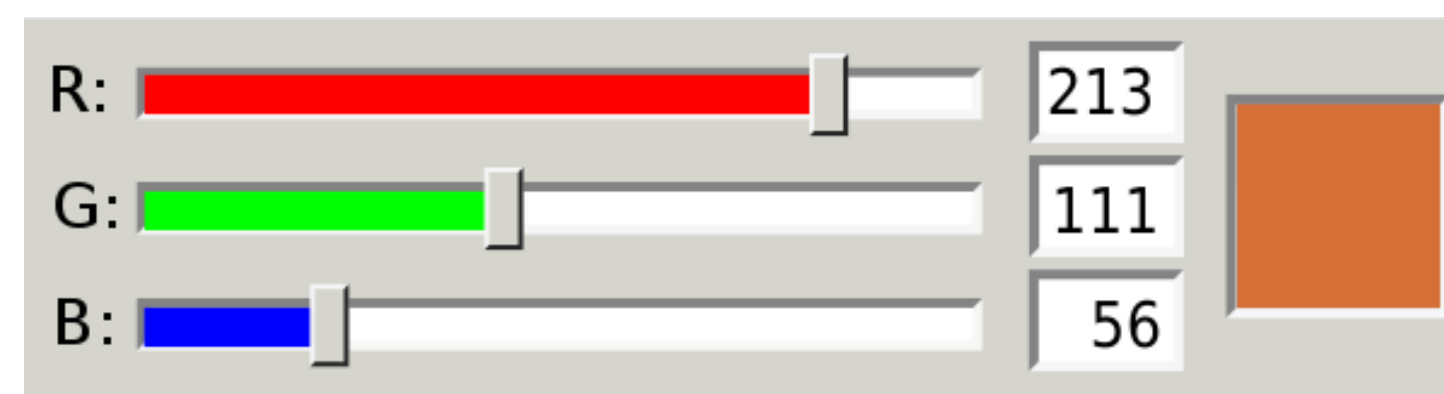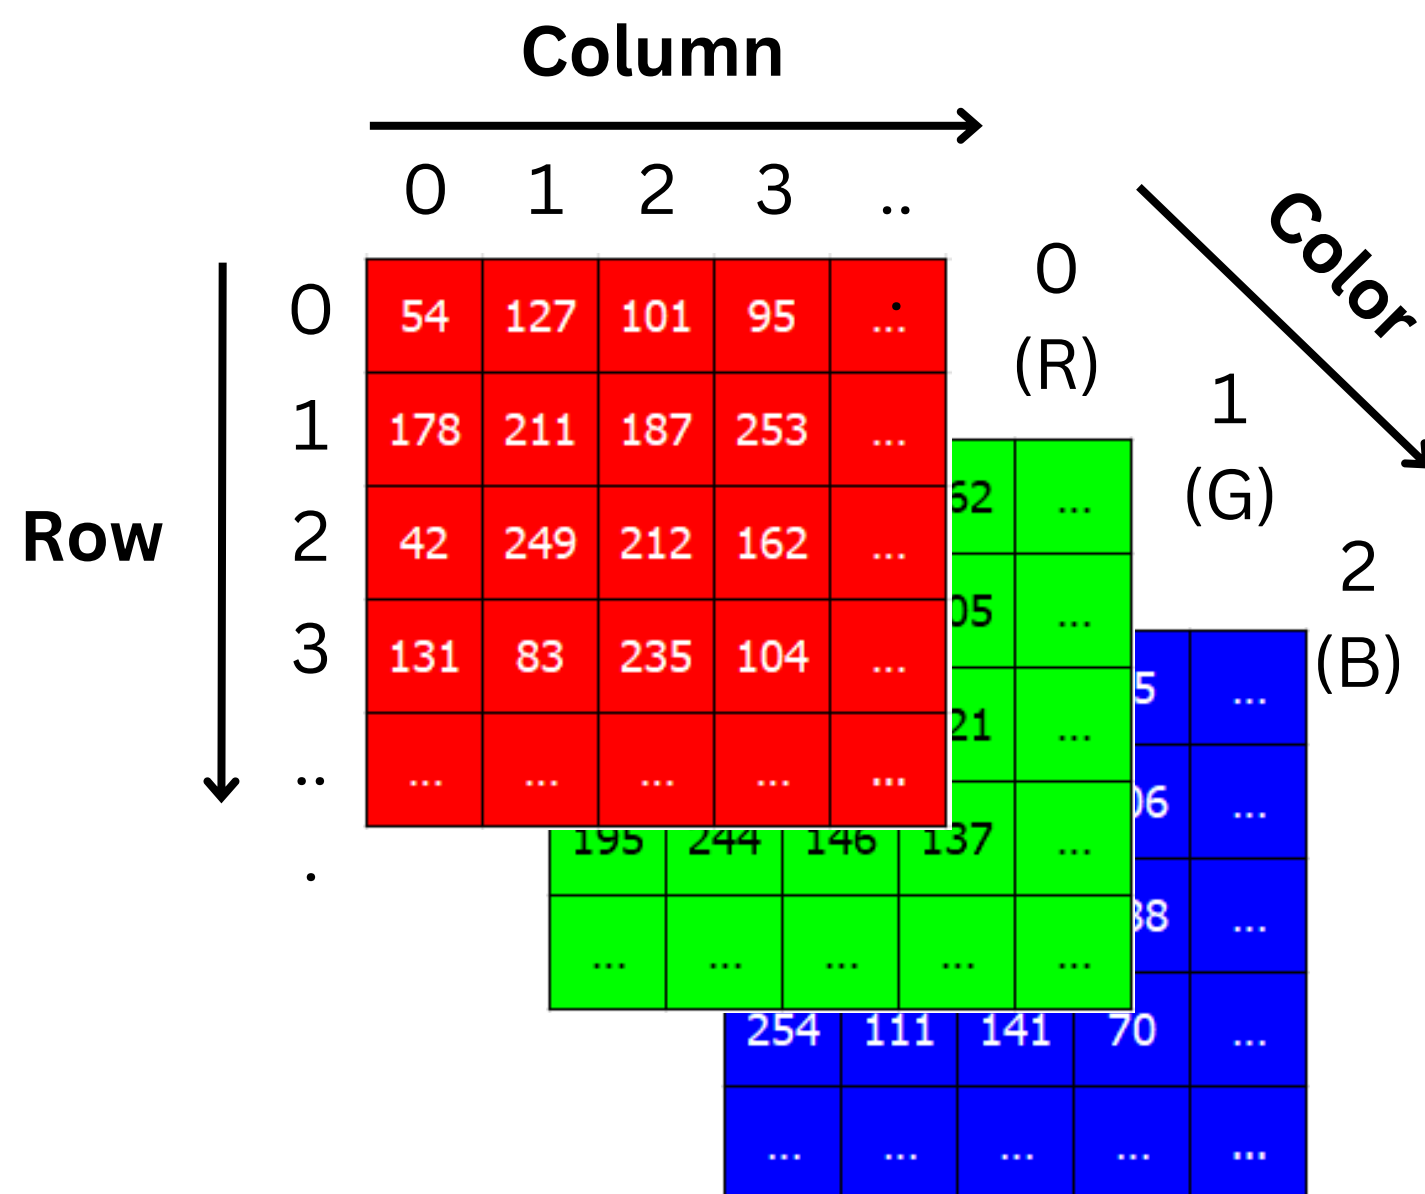

Attempt a quiz

Quiz **7**, Page **3**, Question **6**

